


How to install the Basin bowl, tilt mechanism and plug and waste

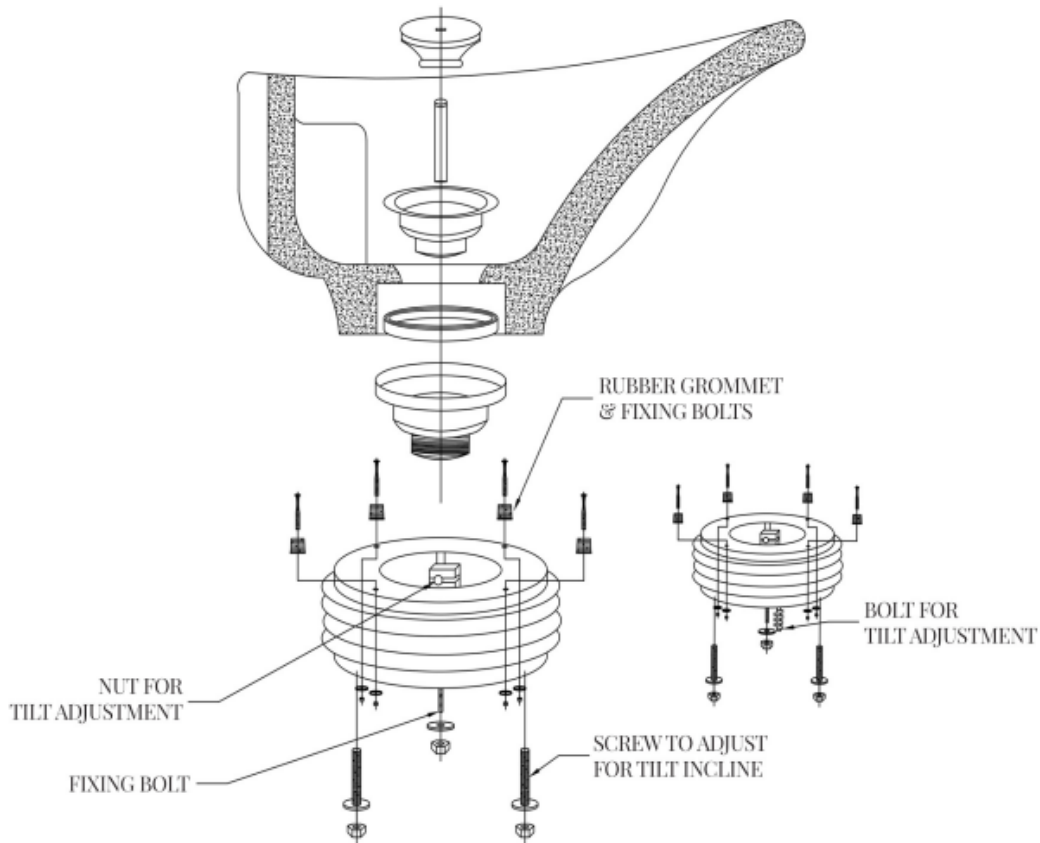

1. Carefully unpack the basin and accessories from the packaging
2. Insert the plug and waste into the basin and seal with silicon.
3. Lay the basin face down on a soft surface and carefully remove the 4 nuts and washers from the rubber gromets in the bottom of the basin. Make sure the bolts do not fall into the basin (you may want to secure them with a little tape to prevent them from falling in).
4. Put the tilt mechanism on the bottom of the basin with the 2 bolts with springs to the front of the basin.
5. Put the washers and nuts on the inside of the tilt mechanism and tighten.
6. Place the rubber outer on the tilt mechanism.
7. Tighten the 2 nuts on the bolts with springs 1 to 1.5 turns, this will stiffen the mechanism and stop the basin from flopping back and forward.
8. Remove the nuts from the 4 holding screws and place the basin on the pedestal and put the washers and nuts on and tighten.
9. Fit the flip mixer and shower head and hose to the basin.

IMPORTANT: Australian legislation requires all fixed plumbing appliances to be installed and fitted by a licensed plumber in accordance with the regulations set out by all local and regional authorities.

Failure to comply with the above may void all warranties.

***DISCLAIMER:** During installation, please ensure that your plumber does not route the hose through the holes in the pedestal. It is recommend to let the hose hang freely outside of the metal pedestal. Doing so may cause the hose to become caught, resulting in damage or breakage. Any damage caused by improper installation will not be covered under warranty.